BRANIFF

WATER SOLUTIONS

Model

SORRENTO MEDIUM URINAL

72.7402.23.B

URINAL

| Features

Urinal Style: Wall-hungColor: White

Material Vitreous China
Flushing System: Fluxometer
Operation: Washout

High-Efficiency Toilet:1 gpf / 3.8 lpf

Average Weight: 36.32 lbs
Top Inlet Spud: ¾"
Trapway Diameter: 1¼"

Working Pressure: Minimum and maximum

2 1/8"

pressure of 80 lbs/in²



Components

Hydraulic seal:











#	Description	Code	QTY
1	Sorrento Medium Urinal	M0102A	1
2	Spud	470616ARM	1
3	Holder	228123750	2
4	Flange	470615ARM	1

| Specifications


- ASME A112.19.2-2018/CSA B45.1-18



Tecnical Data

Section	Measures
Α	15 ½ "
В	2 ¼ "
С	Ø 1 9/16"
D	11 ¼"
E	4 ½ "
F	6 ¾ "
G	24 ½ "
Н	19 ¾ "
	22 ½ "
J	5 "
K	19 ½ "

^{*} Dimension tolerance of ±5%

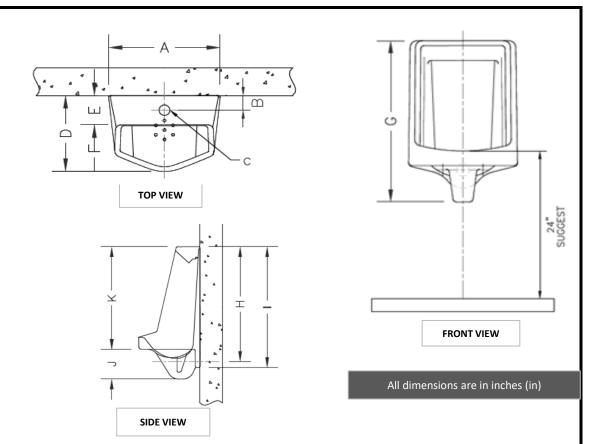

Instalation

Clean the installation area and make sure the distances are correct. adjust the spud and the flange to the urinal. Secction the wall according to the distances taken from the urinal and mark the location of the holes and drilling. Place the fixing kit to the wall. Finally, place the urinal on the wall by holding it with the supports.

| Recomendations

- Check the floor is leveled before installing the urinal
- •Before connecting to the hydraulic network, verify that the distance between the wall and the urinal discharge coincide with the entrance of the hydraulic network.
- •The urinal is fragile and may break during manipulation, gloves are recommended during installation.
- "Use antifungal silicone sealant for the joints of the toilet with the floor, do not use cement or adhesive plaster.
- •When installing the fixing screws, take care not to exceed the tightening force of the nuts, as this can break the toilet.

Maintenance

- •Clean the surface with a water-damped cloth.
- •Never use cutting items, fibers, sandpapers, detergents, solvents, liquids or abrasive powders to clean the bowl.

| Warranty

All products commercialized by BRANIFF are designed, manufactured and tested accordingly to our quality system and to international standards if any manufacturing or workmanship defect were to be presented on the product and corroborated by BRANIFF, it will be replace it without cost to buyer. Finishes are warranted against manufacturing defects for 10 (ten) years on vitreous china and 1 (one) year on moving parts and accessories.